

TRUCKRUN ©024 EBIKE SYSTEMS

Product manual

Drive System | Intelligent Drive | Accessories | Support





Contents

ABOUT TRUCKRUN

7-3 Create eBike drive systems **SMART RIDING SOLUTIONS** App and TruckRun IOT Solutions 4-5 eBike background management systems **CUSTOMIZED SOLUTIONS** 6 Meet the multiple complex needs of customers **HUMAN-VEHICLE COLLABORATION SOLUTIONS** Integrated, small size, big effect, comfortable and intelligent riding **EBIKE DRIVE SYSTEMS** 8-17 mountain, fat tire, city, road, travel TRUCKRUN MAIN MODELS 18-23 Dedicated to you our proudest work LIST OF PRODUCT PARAMETERS 24-32 Mid drive motor, hub motor, controller, display and sensor **FOLLOW TRUCKRUN** 33 Welcome to our official website and social media

Drive Systems Smart Riding

Human-Vehicle

ABOUT TRUCKRUN

Create eBike drive systems

Truckrun was jointly established by experienced bicycle practitioners and enthusiasts. We poured our enthusiasm into the design of each product, and achieved technical self-research results in key core areas such as motor research and development, intelligent cycling, and human-vehicle collaboration. We insist on building our own intelligent manufacturing base as the only production model, and build our own supply chain system to ensure the high-quality supply of core components.

At present, our business covers more than 40 countries and regions around the world, covering various fields such as top competitive brands, overseas high-end brands and sharing platforms. In addition to eBike motors, Truckrun also deploying electric motorcycles, electric boats, robots and other categories.

30%


Proportion of technicians

15[†]

Core team R&D experience

50[†]

Chinese, American and Japanese patents

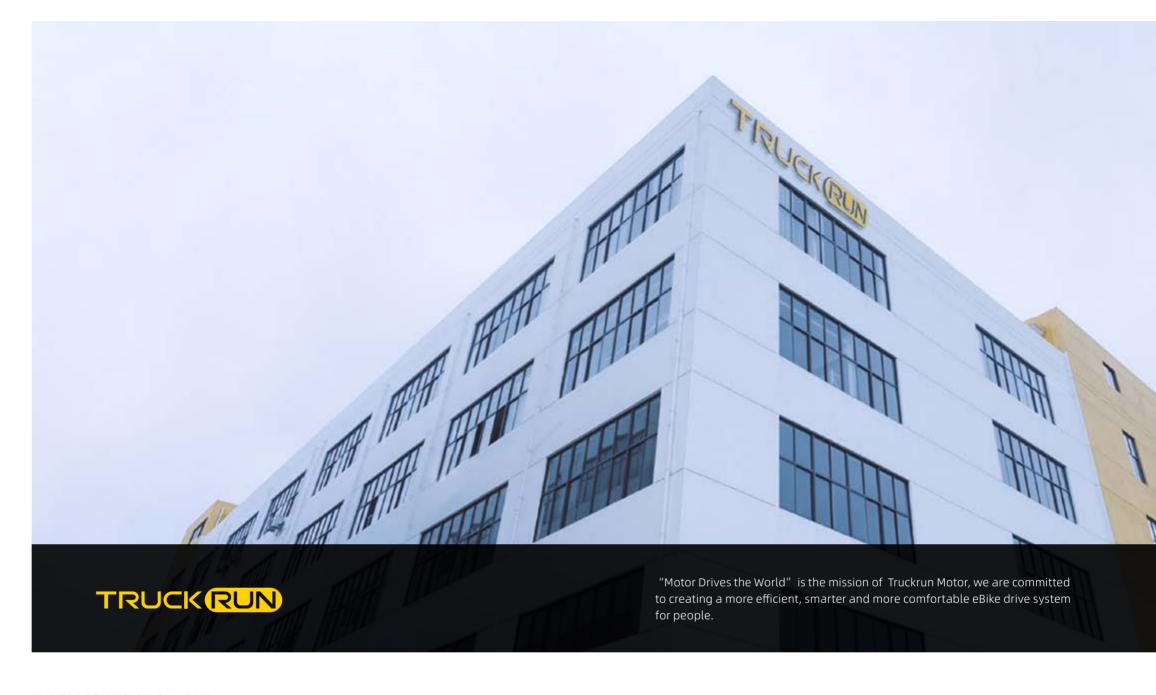

INTELLIGENT HIGH-END MOTOR LEADER

The vision of "committed to becoming a leader in intelligent high-end motors" is driving us to continuously pursue the ultimate products and efficiency. We invest a lot of energy in research and development, and the proportion of technical personnel reaches 30%, the core team has more than 15 years of experience. Truckrun stands out through continuous technological breakthroughs and innovations, such as the industry-leading ultra high-torque mid drive motor M09, the powerful and versatile mid drive motor M03, and the High-strength quick-release barrel shaft motor RN04 etc, which have achieved a continuous miracle Truckrun.


SMART RIDING

We believe that ebike is not only a means of transportation, but also a way of life that represents the future, so we created the Truckrun IOT Solution ™. It connects bicycles, APPs, drive units, control units, and displays with each other through Bluetooth and cellular data networks. Riders can enjoy more riding fun through it, and eBike companies can use it to upgrade services and establish close ties with consumers.

HUMAN-VEHICLE COLLABORATION

Truckrun is committed to bringing users a good riding experience of "integration of human and vehicle". We focus on this point at the beginning of product design, and constantly optimize products based on massive test data. At present, more than 95% of Truckrun hub motors can be equipped with tower base torque, and the mid drive motor is fully integrated with the center axis torque sensor, making your eBike more intelligent, comfortable and agile.

About TruckRun
TruckRun eBike System Product Manual 2024 Edition

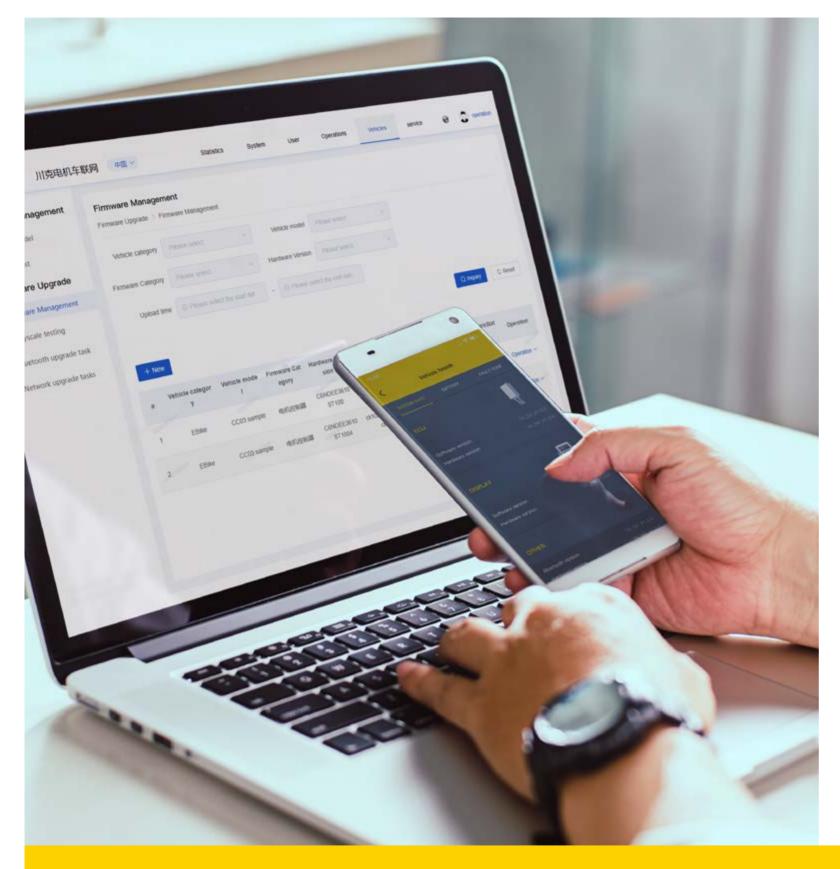

SMART RIDING SOLUTION

We believe that eBike is not only a means of transportation, but also a way of life that represents the future. For this reason, we developed the Truckrun APP and created the Truckrun IOT Solution™. They connect bicycles, APPs, drive units, control units, and displays with each other through Bluetooth and cellular data networks. Riders can enjoy more riding fun through it, and eBike companies can use it to upgrade services and establish a close relationship with consumers.

01 eBike background management system

Upgrade services and establish a close relationship with consumers

Improve user experience

Global active time analysis, regional activity analysis for targeted events, targeted outlets for news push, and product firmware upgrades for users

Promoting products

Publish product promotion information through the background to let customers know about the latest products and promotional activities

Operations Management

Electronic fence can be set up to remind riders beyond the area

EBIKE MANAGEMENT SYSTEM



TruckRun eBike System Product Manual 2024 Edition 5

02 App & Truckrun IOT Solution

Let the rider enjoy more fun

Simple Model

Only need a Bluetooth display or other Bluetooth modules to use


Your eBike can communicate with the APP to form information interaction through any Bluetooth-enabled device, and riders can enjoy many intelligent control functions on the mobile phone.

Virtual code table

After the connection, the APP can display a very rich vehicle information. Compared with the display (LED & broken code), the information displayed by the APP is more abundant



Can query riding data and riding track



Through the APP forward function, the eBike can be kept up to date at any time

Parameter settings

It can meet the individual needs of riders, and the eBike parameters can be set in detail according to the needs to adapt to different road conditions

Navigation function

The APP can be connected with third-party map software, such as Google Maps, to call data for navigation and plan cycling routes. With Truckrun bluetooth color screen display such as CC03, CC05, you can also perform path projection on the display screen to easily find the cycling route





IOT (Android)







Advanced Model

Through TruckRun IOT Solution ™ Enjoy a digital cycling life


With the IOT-enabled display screen, your ebike can form information interaction with the APP through the cellular network. TruckRun IOT Solution ™ can support all functions of the simple mode and realize more advanced functions

Remote monitoring

The APP and IOT communicate through the 4G network, even if the person and the vehicle are separated, you can easily control the vehicle status and monitor the status of the vehicle in real time

Intelligent anti-theft

Precisely locate the vehicle, you can set the alarm, once the vehicle is moved, the alarm will notify the owner to prevent the vehicle from being stolen

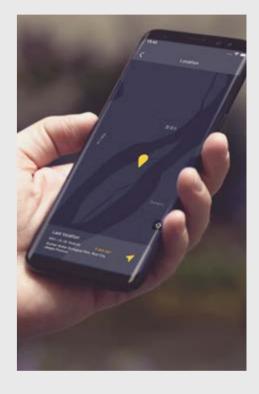

Equipment to support Truckrun IOT Solution ™



E03: Easy to handle, focused riding

Bluetooth function Walk assist function Real-time vehicle status Automatic headlight



CC03: Rich information is under control

Bluetooth function Walk assist function Real-time vehicle status Automatic headlight type-c charging function



CC05: Rich information is under control

Bluetooth function Walk assist function Real-time vehicle status Automatic headlight type-c charging function

TruckRun eBike System Product Manual 2024 Edition Smart Riding Solution **7**

HUMAN-VEHICLE COLLABORATION SOLUTION

Hub motor sensor Cassette torque



reasons to choose the cassette torque

Integrated, small size, big effect, feel comfortable and smart riding



Improve power ratio accuracy
The Cassette torque sensor can perception the rider's pedaling force very accurately, so that the motor can respond more accurately and output appropriate power



Save battery energy and prolong battery life The motor outputs appropriate power according to actual needs,

avoiding energy waste caused by outputting extra power, so as



Increase motor sensitivity


Various riding information is transmitted to the motor in real time through the Cassette torque sensor, which is especially suitable for



Improve riding comfort
Mechanical gear shift perception, precisely responding to the needs of electric bicycle users



Truckrun Motor is committed to becoming a leader in intelligent high-end motors, bringing riders a good experience of " integration of human and vehicle". For this reason, we focus on this point at the beginning of product design, and continuously optimize products based on massive test data. At present, more

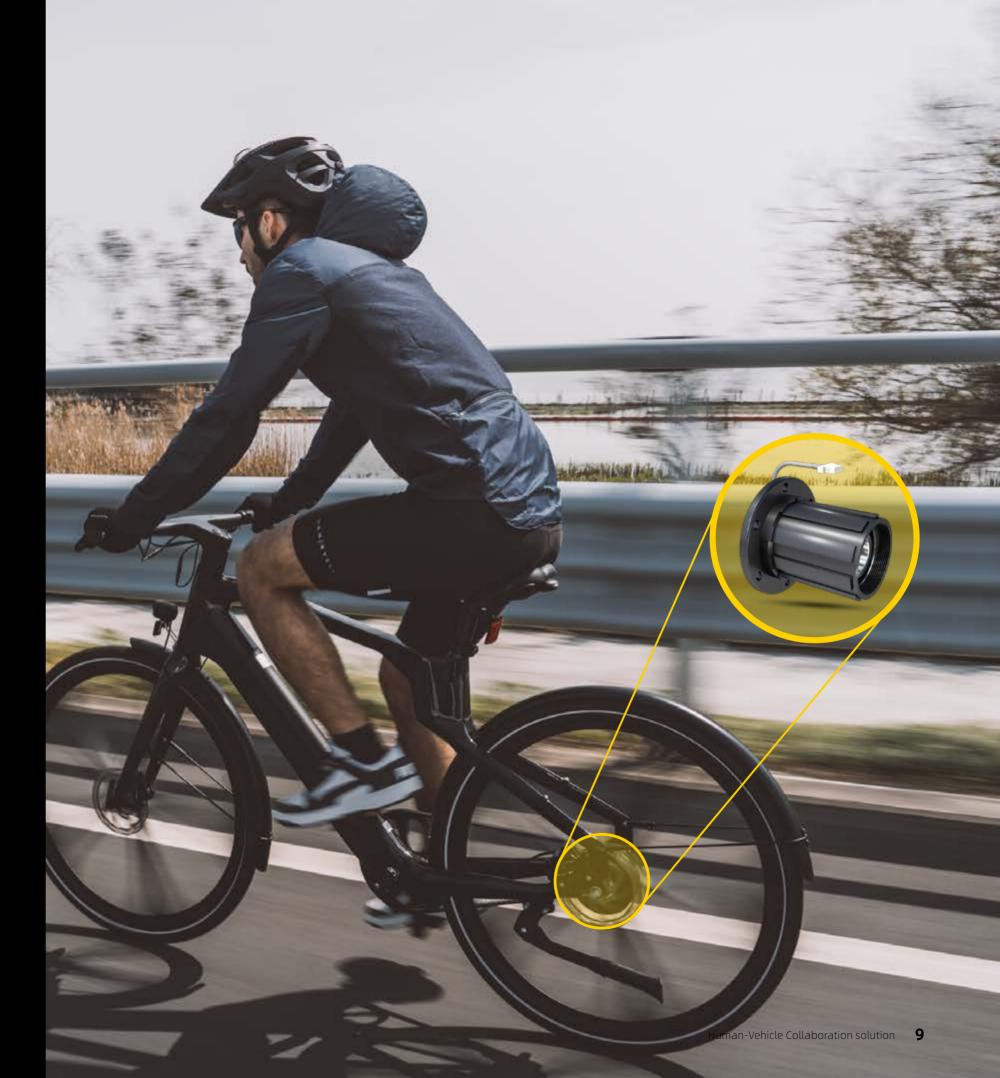

CUSTOMIZED SOLUTIONS

Meet the multiple complex needs of customers

We have a professional R&D design system, perfect quality control capabilities and mass production capabilities, providing customized drive system solutions for eBike, including motor design, controller systems, etc. The intelligent production capacity with high automation and full process traceability can meet the multiple and complex needs of customers.



SOLUTION

Performance customization

We have the industry's top R&D and design capabilities, and can realize the ideas of our partners in terms of power, torque, lightweight design, response speed, running sound, etc. according to the demands.

Function customization

We have developed a powerful ebike management system, the OTA function keeps the eBike driving system up to date, and the vehicle management system helps store operations and activities. There are many other features waiting for you to explore.

Appearance customization

We meet customers' customized needs for product appearance through professional design and craftsmanship. Whether it is size or appearance style, it is guaranteed to meet the ID design of eBike.

10 TruckRun eBike System Product Manual 2024 Edition

Customized solutions 11





Zenith Series M03 Edition

Compact and powerful, help you concentrate on exploring unknown peaks



M03

Strong power: rated power 350W-500W, maximum torque up to 140N.m ISIS Shaft (Optional): Responsive, powerful, sprag clutch for quiet and smooth operation



CC08

1.96 inch TFT color screen

Compact design for mountain environments
type-c Charging function

Walk function



Specially designed for mountain enthusiasts, powerful and intelligent, mountain legend



M09

6

Power performance: rated power 750W, maximum torque up to 150N.m ISIS Shaft (Optional): Responsive and Powerful

Efficient heat dissipation: streamlined wind resistance heat dissipation ribs, efficient heat dissipation, stable and durable



CC03

3.5-inch central TFT color screen type-c charging function

Auto Sensing headlights, Walk function Bluetooth function, navigation mapping

Zenith Series RW28 Edition

High-power hub MTB drive system



RW28

65

Strong power: rated power 750W, maximum torque up to 70N.m

Sensitive Response: It can integrate the torque of the cassette, sensitively perceive the needs of the rider, and adjust the output power in a timely manner



CB01-X


3.5-inch central LCD dot matrix screen USB charging function
Auto Sensing headlights
Walk function

FAT-TIRE BIKE/ CARGO

Maverick Series

Maverick Series advanced drive system adopts industry-leading high-torque motors to provide you with powerful assistance, easy traverse various complex terrians, and transport heavy goods smoothly.

Good mechanical structure and heat dissipation system, continuous and stable output power, avoiding overload and other problems caused by high power, efficient and reliable.



motor has reached more than 220N.m, which means that our products are at the leading level in the world. This is due to Truckrun's great emphasis on innovation and unremitting pursuit of cutting-edge technology. We invest a lot of money in research and development every year, and the technical team accounts for 30%. Many core team members have more than 15 years of work experience.

Truckrun IOT solution

Maverick Series M09 Edition

Smooth all-terrain, the strongest drive system of Truckrun so far



M09

Strong power: rated power 750-1200W, maximum torque up to 220N.m

ISIS Shaft (Optional): Responsive and Powerful Efficient heat dissipation: streamlined wind resistance heat dissipation ribs, efficient heat dissipation, stable and durable



CC05

3.5 inch central horizontal screen TFT color screen

type-ccharging function
Auto Sensing headlights, walk function
Optional Bluetooth, IOT, navigation mapping
function



Maverick Series Dual Drive Version

Dual drive fat tire system



FW29+RW29

Strong power: maximum torque (90*2) N. m Power (1000/1200/1500W) *2

Quick response: Axis speed sensor, sensitive to the needs of riders



CB03

1.6-inch left LCD break code screen walk function Battery status monitoring





2024 truckrun E-bike System



Urbanite Series M03 Edition

Riding Comfortable and powerful



ISIS Shaft (Optional): Responsive, Powerful Quiet and stable: sprag clutch ensures quiet and smooth operation



CB01-X

3.5-inch central LCD dot matrix screen USB charging function Auto Sensing headlights Walk function



Urbanite Series M06 Edition

Simple and pure, cost-effective, modular design and easy maintenance



Strong power: rated power 250W, maximum torque up to 95N. m Modular design: easy to install and maintain



CB03

1.6-inch left LCD break code screen walk function Battery status monitoring





truckrun E-bike System



Aurora Series RN04 Edition

Quick release structure, high speed, sensitive response, simple appearance





RN04



Power: rated power 250W, maximum torque 28N.m

Lightweight: weight 2.0KG

Quiet: high-strength barrel shaft design < 55

decibels

Quick release: quick wheel change



E03

LED display Auto Sensing headlights Walk function Truckrun IOT





Aurora Series RN02 Edition

High torque, responsive, simple appearance





RN02-C

Power: rated power 250W, maximum torque 38N.m

Sensitive: Integrate cassette torque, keenly perceive the needs of the rider, and adjust the output power in a timely manner Lightweight: weighs only 2.1KG Quiet: high-strength barrel shaft design < 55

decibels



E03

LED display Auto Sensing headlights Walk function Truckrun IOT

Road Bike Aurora Series



2024 truckrun E-bike System



Odyssey Series M01 Edition

Balanced performance, sharing the fun of travel



Strong power: power 350/500W, maximum torque up to 140N.m Responsive: central axis torque sensor, to achieve precise control of the vehicle Strength classic: one of the best-selling motors of TruckRun, with balanced performance



CA02-X

3.5-inch LCD break code screen USB charging function Walk function

Headlights, battery power status monitoring



Odyssey Series M03 Edition

Relaxed, intelligent and joyful, enjoy unlimited travel possibilities



Power performance: Power 350/500W, maximum torque up to 140N.m Sensitive Response: Sensitively perceive the needs of riders and timely adjust the output power



CC03

3.5 " TFT color screen type-c charging function Auto Sensing Headlights Walk function Bluetooth, navigation mapping function



Odyssey Series RW06 Edition

All the way, not just riding



RW06

Balanced masterpiece: power 350W, maximum torque

Quick response: The center shaft speed sensor senses the needs of the rider and adjusts the output power in

Configurable integrated wheel: quick assembly, labor saving, easy maintenance



CC01-X

3.5 " TFT color screen USB charging function Auto Sensing Headlights Walk function



Balanced Performance Excellent Upgrade

M03 is a brand new upgraded version of the classic motor M01, it is an excellent upgraded product.

The power of the M03 motor can be configured from 250 to 500W, which is suitable for various scenes such as cities, roads, touring, mountains, beaches, and snow, and has a maximum torque of up to 140N.m. This means that it has stronger power output and excellent climbing ability, and is more stable and reliable in environments such as snow or soft sand.

Comfortable Riding

M03 also has a built-in high-sensitivity torque sensor and a high-strength ISIS center shaft, which can accurately measure the rider's power output during riding, and feed this information back to the motor controller to control the output of the motor, providing better explosive power and accelerate performance.

Whether it's on tricky off-road trails or your daily commute, the M03 delivers exceptional performance and riding experience.

Quiet and Soft

A sprag clutch is used instead of a ratchet clutch, which makes the return angle of the bottom bracket close to about 0 degrees, resulting in a softer ride. In addition, the sprag clutch further reduces the noise of the motor and improves riding comfort.



Super power, Designed for All Kinds of Off-road Terrain.

M09 is the most powerful ebike motor of TruckRun Motor so far. It has multiple power options of 1200/1000/750W, and the maximum torque is up to 220N.m. It makes your E-mountain bike easy to climb steep hills, and let the ebike move freely in the sand and snow.

Streamlined Appearance Design, Stable and Long-lasting Operation

While providing powerful power, the M09 adopts a special streamlined design that allows heat to be dissipated in time and ensures the motor can run stably for a long time.


Comfortable Experience, Flexible Response to Various Situations

The built-in high-sensitivity torque sensor can be equipped with an ISIS shaft, which can sense changes in pedaling force at any time and adjust the power output to bring a comfortable riding experience to the rider.





22 TruckRun eBike System Product Manual 2024 Edition TruckRun Main Models 23

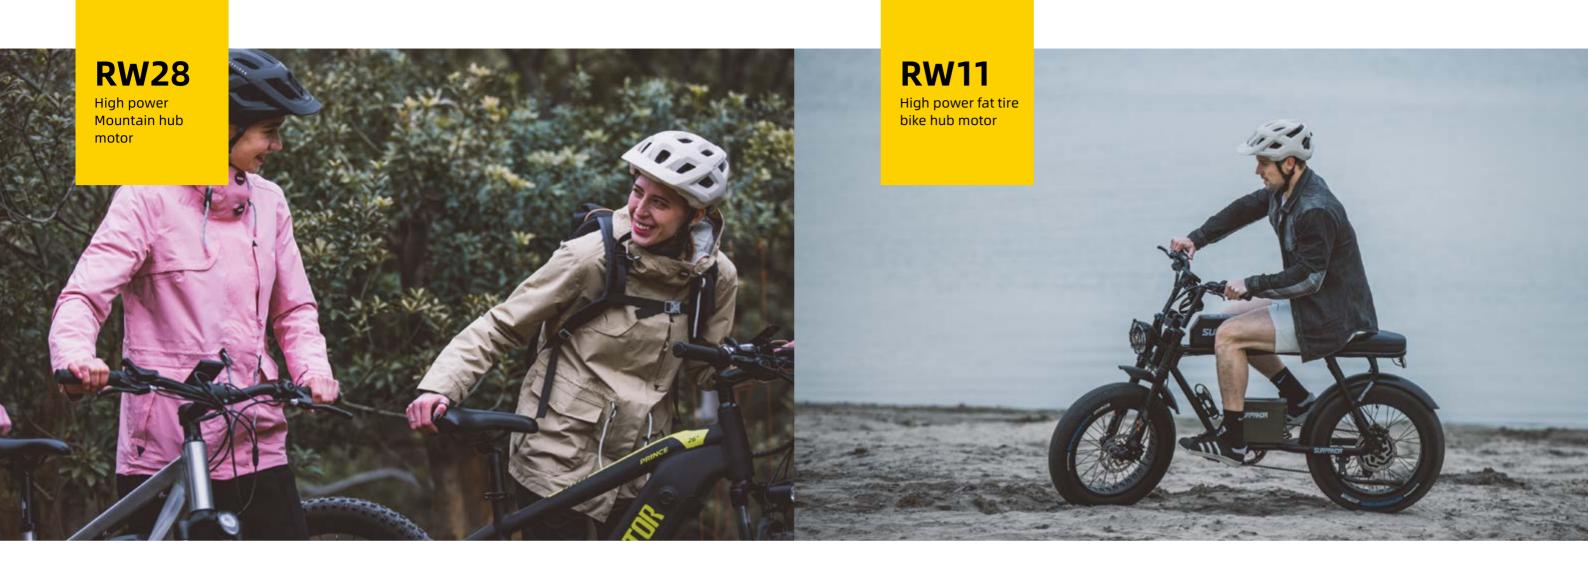

Designed for Mountains

RW28 is a high-power hub motor specially designed by TruckRun for E-mountain bikes, with a rated power of 750W and a maximum torque of 70N.m.

Smooth Riding Experience

The optional high-sensitivity torque sensor can achieve a natural and smooth riding experience while extending battery life.



Specially Designed by TruckRun for Fat Tires

RW11 is a lightweight and high-power hub motor specially designed by TruckRun for fat tires. It can help vehicle factory control the costs, and the maximum torque is up to 80N.m, so that more people can enjoy the joy of riding on the beach and snow.


Streamlined Appearance Design, Stable and Longlasting Operation

As a fat tire motor, RW11 has a good power performance and can provide a maximum torque output of 80N.m. Its weight is only 3.8kg.





24 TruckRun eBike System Product Manual 2024 Edition
TruckRun Main Models **25**

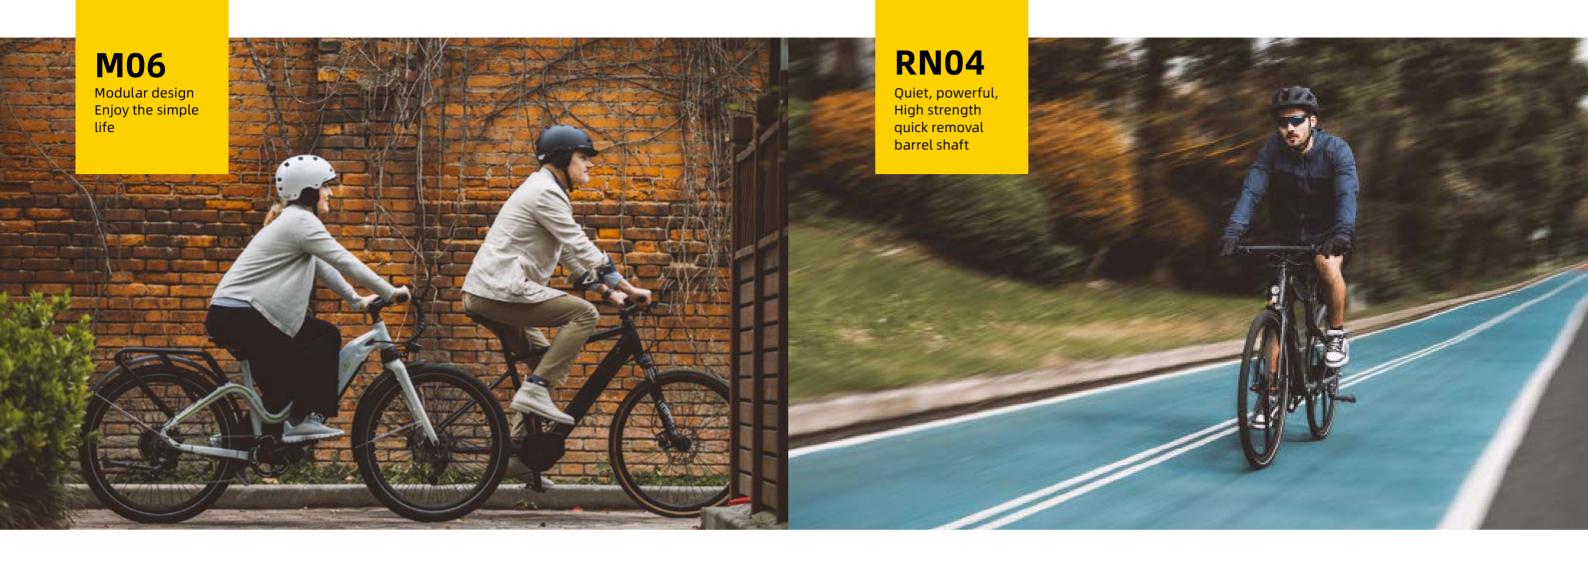

Specially Designed for Urban Environments, Sensitive to Various Situations

The built-in high-sensitivity torque sensor can sense the change of pedaling force at any time, adjust the power output, and bring a comfortable riding experience to the rider.

Easy and Simple Maintenance Experience

Modular design, the controller adopts external assembly method, which is convenient and fast for installation and maintenance.

High Cost Performance, Let More People Experience the Joy of EBike

Thanks to the excellent integrated design, M06 saves manufacturing costs, making it cheaper than motors with the same power, and consumers can get excellent experience with less money.



Light and Fast, Enjoy the Thrill of Riding

TruckRun RN04 is specially made for high-end road bikes, it weighs only 2.0KG and contains powerful energy. 250W of power bursts out to a top speed of 420 (±10) with less than 55 dB of noise. Let your ebike easily get rid of the shackles and help you enjoy the thrill of riding.

High-strength Thru-shaft, Stable and Durable

RN04 adopts an industry-leading barrel shaft design, which is stronger than traditional hub motors. After the salt spray test, the performance broke through 96 hours. The waterproof level reaches IPX5 level, the efficiency is \geq 80%, and the performance is stable and long-lasting.

Quick Disassembly Function, No Fear of Emergencies

The RN04 is equipped with a quick disassembly function, allowing you to handle any unexpected situation, while also meeting the needs of enthusiasts.





26 TruckRun eBike System Product Manual 2024 Edition TruckRun Main Models **27**

MID-DRIVE MOTOR

M03 M01 M06 M09 OVERVIEW Simple life Super performance Strength classic Excellent upgrade SUITABLE MODEL City/Road/Trekking City/Trekking/MTB MTB/FAT City DIMENSION Dimension diagram A (mm) 205 202 220 233 B (mm) 135.5 135.5 148 144.5 153 C (mm) 153 153.5 163 Start-up behaviour powerful powerful harmonious agile sporty PARAMETER 36 Rated voltage(Vdc) 36-48 36-48 48-60 Rated power (W) 250/350/500 250/350/500 250 750/1000/1200 100/100/115 100/100/115 90 120/135/160 Rated speed(Rpm) 100/120/140 Maximum torque(N.m) 100/120/140 95 150/200/220 Shaft type JIS JIS/ISIS JIS JIS/ISIS Weight (kg) 3.3/3.6/3.8 3.3/3.6/3.8 3.4 5.8/6.0 Efficiency (%) ≥80 ≥80 ≥ 80 ≥80 **FUNCTION** Power off brake optional optional optional optional Handlebar throttle optional optional optional optional 6V3W 6V3W 6V3W Lights voltage (V/W) 6V3W Pedal assist function optional optional optional optional Gear sensor optional optional optional optional Noise (dB) < 55 < 55 < 60 < 60 IP Level IPX6 IPX6 IPX6 IPX6 -20~55 -20~55 Operating Temperature (°C) -20~55 -20~55









TruckRun's products have passed EN15194, ROHS, CE and UL tests and certifications

HUB MOTOR

	-	-	1	-
	FN01-A	RN02	RN04	RW01-L
SUITABLE MODEL	City/Road	City/Road	City/Road	City/Road
DIMENSION				
Dimension diagram				
Integrated wheel	Optional	-	-	-
A (mm)	42.5	40	36.6	39.5
B (mm)	ф102.2	ф121.7	ф121.8	ф140.8
C (mm)	ф44	ф44	ф60	ф44
D (mm)	10.5	15.25	15.25	15.25
E (mm)	2.5	19.6	43.7	38.5
OLD (mm)	100	100/130/142	135/142	100/135/142
Wheel diameter (Inch)	20-29	20-29	20-29	20-29
Installation mode	Front Drive	ALL FIT	Front Drive/Cassette	ALL FIT
Spoke size	12G-13G/36H	12G-13G/36H	12G-13G/36H	12G-13G/36H
Cabling Route	Shaft Side	Shaft Side/Shaft End	Barrel shaft/Shaft Side	Shaft Side/Shaft End
PARAMETER		_		
Rated voltage(Vdc)	36	36	36	36
Rated power (W)	250	250	250	250
Rated speed(Rpm)	225-325	225-365	325-380	200-325
Maximum torque(N.m)	32	38	28	40
Weight (kg)	1.8	2.1	2	2.8
Efficiency (%)	≥ 80	≥ 80	≥ 80	≥ 80
FUNCTION				
Integrated Torque	-	Optional	Optional	Optional
Power off brake	Optional	Optional	Optional	Optional
Handlebar throttle	-	-	-	-
Lights voltage (V/W)	-	-	-	-
Pedal assist function	Optional	Optional	Optional	Optional
Noise (dB)	< 55	< 55	< 55	< 55
IP Level	IPX5	IPX5	IPX5	IPX5
Operating Temperature (°C)	-20-55	-20-55	-20-55	-20-55









TruckRun's products have passed EN15194, ROHS, CE and UL tests and certifications.

28 TruckRun eBike System Product Manual 2024 Edition 29

HUB MOTOR



-20-55

Operating Temperature (°C)







	RW06	RW05-L	RW12	RW11
SUITABLE MODEL	Trekking/MTB	Trekking/MTB	City/MTB	FAT
DIMENSION				
Dimension diagram				
Integrated wheel	Optional	-	-	Optional
A (mm)	40.8	40.8	40.8	68
B (mm)	ф158.8	ф158.8	ф158.8	φ158.5
C (mm)	ф44	ф44	-	ф44
D (mm)	15.25	15.25	24	15.25
E (mm)	38.3	39.2	39	39.5
OLD (mm)	100/135	140	145-160	135/175/185/190
Wheel diameter (Inch)	20-29	20-29	- -	20-29
Installation mode	Front Drive/Screwed	Cassette	Screwed	Cassette/Screwed
Spoke size	12G-13G/36H	12G-13G/36H	12G-13G/36H	36H*13G(12G)
Cabling Route	Shaft End	Shaft End	Shaft End	Shaft End
PARAMETER				_
Rated voltage(Vdc)	36/48	36/48	36/48	48
Rated power (W)	350/500	350/500	350/500	350/500/750
Rated speed(Rpm)	225-420	225-420	240-480	240-480
Maximum torque(N.m)	50	50	50	80
Weight (kg)	3.4	3.5	3.4	3.8
Efficiency (%)	≥ 80	≥ 80	≥ 80	≥ 80
Function				_
Integrated Torque	-	Optional	Optional	Optional
Power off brake	Optional	Optional	Optional	Optional
Handlebar throttle	Optional	Optional	Optional	Optional
Lights voltage (V/W)	-	-	-	-
Pedal assist function	Optional -	Optional	Optional	Optional
Noise (dB)	< 55	< 55	< 55	< 55
IP Level	IPX5	IPX5	IPX5	IPX5
				

-20-55



-20-55



-20-55



TruckRun's products have passed EN15194, ROHS, CE and UL tests and certifications.

HUB MOTOR









	RW11-20Z	RW06-20Z	RW28	RW29
SUITABLE MODEL	FAT	City/MTB	МТВ	FAT
DIMENSION				
Dimension diagram	-{-	-{-		
Integrated wheel	Yes	Yes	-	-
A (mm)	74.3	25	38.5	65
B (mm)	ф420	ф420	ф192.4	ф191.2
C (mm)	ф44	ф44	ф44	ф44
D (mm)	15.25	15.25	15.25	15.25
E (mm)	41.45	39.8	38	39.5
OLD (mm)	175	137	100/138	135/175/185/190
Wheel diameter (Inch)	-	-	20-29	20-29
Installation mode	Cassette/Screwed	Cassette/Screwed	ALL FIT	Cassette/Screwed
Spoke size	-	-	12G-13G/36H	36H*13G(12G)
Cabling Route	Shaft End	Shaft End	Shaft Side	Shaft Side
PARAMETER				
Rated voltage(Vdc)	48	36/48	48	48
Rated power (W)	500/750	350/500	750	1000/1200/1500
Rated speed(Rpm)	240-480	225-420	345-520	320-680
Maximum torque(N.m)	65-80	50	70	90
Weight (kg)	5.6	4.6	4.2	5.6
Efficiency (%)	≥ 80	≥ 80	≥ 80	≥ 80
Function				
Integrated Torque	-	Optional	Optional	Optional
Power off brake	Optional	Optional	Optional	Optional
Handlebar throttle	Optional	Optional	Optional	Optional
Lights voltage (V/W)	-	-	-	-
Pedal assist function	Optional	Optional	Optional	Optional
Noise (dB)	< 55	< 55	< 55	< 55
IP Level	IPX5	IPX5	IPX5	IPX5
Operating Temperature (°C)	-20-55	-20-55	-20-55	-20-55









TruckRun's products have passed EN15194, ROHS, CE and UL tests and certifications.

ELECTRIC SCOOTER MOTOR





201	FZ02	RZ0

	FZ01	FZ02	RZ05
SUITABLE MODEL	8' E-Scooter	10' E-Scooter	12' E-Scooter
DIMENSION			
Integrated wheel	-	-	-
A (mm)	-	-	-
B (mm)	-	-	-
C (mm)	-	-	-
D (mm)	-	-	-
E (mm)	-	-	-
OLD (mm)	76	90.5	130
Wheel diameter (Inch)	-	-	-
Installation mode	-	-	-
Spoke size	-	-	-
Cabling Route	Shaft End	Shaft Side	Shaft End
DETAILED PARAMETER			
Rated voltage(Vdc)	36	36/48	36/48
Rated power (W)	250/350	350/500	350
Rated speed(Rpm)	680-820	680-820	680-820
Maximum torque(N.m)	20	20	25
Weight (kg)	3.3	3.5	3.5
Efficiency (%)	≥ 80	≥ 80	≥ 80
FUNCTION			
Integrated Torque	-	-	-
Power off brake	Optional	Optional	Optional
Handlebar throttle	Optional	Optional	Optional
Lights voltage (V/W)	-	-	-
Pedal assist function	-	-	-
Noise (dB)	< 55	< 55	< 55
IP Level	IPX5	IPX5	IPX5
Operating temperature (℃)	-20 ~ 55	-20 ~ 55	-20 ~ 55










TruckRun's products have passed EN15194, ROHS, CE and UL tests and certifications

ELECTRIC MOTORCYCLE MOTOR: M30



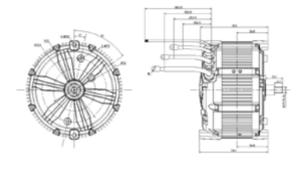

M30

Suitable model	Sand/Jungle/Snow/Beach		
Rated power (W)	3000-6000		
Rated voltage(Vdc)	60-72		
Efficiency (%)	≥ 80%		
Rated speed(Rpm)	5000-7500		
Maximum torque(N.m)	30-60		
Stator insulation class	Class F		
Noise (dB)	< 55		
IP Level	IP65		
Operating temperature (℃)	-20 ~ 45		

DUAL DRIVE & DUAL BATTERY SYSTEM





Single battery discharge automatic switching. Low voltage protection function.



Increase mileage


Low power consumption, long-term durability.



















TruckRun's products have passed EN15194, ROHS, CE and UL tests and certifications.

32 TruckRun eBike System Product Manual 2024 Edition List of motor parameters **33**

CONTROLLER





CT602(UART) XCT602(CAN)



CD901(UART) **XCD901**(CAN)

	ACSOUTA(CAN)	ACTOO2(CAN)	ACD 30 I (CAN)
DIMENSION			
Dimension diagram		A B	
A (mm)	85	166	130
B (mm)	53	33	62
C (mm)	30	31	65
GENERAL PARAMETERS			
Rated voltage(Vdc)	24/36/48	36/48	48/52/60
Current limiting value (A)	18/15/14	15/13	22*2
Undervoltage value(DCV)	20/31/40	31/40	31/40/45
Rated current (A)	9/7/7	7/6	11*2
Rated power (W)	250~350	250	(500/750/1000/1500)*2
Weight(g)	222	290	930
FUNCTION			
Control type	Sine	Sine	Sine
Brake type	Low level	Low level	Low level
PAS Mode	Speed / Speed + Torque	Speed / Speed + Torque	Speed / Speed + Torque
Speed regulating voltage (V)	1.1~3.9	1.1~3.9	1.1~3.9
Support mode	0~9	0~9	0~9
Walk-Assit (km/h)	6	6	6
Lamp module (DCV/W)	6/3(max)36/18(max)	6/3(max)36/18(max)	6/3(max)36/18(max)
IP Level	IPX5	IPX5	IPX5
Operating temperature (°C)	-20~55	-20~55	-20~55








TruckRun's products have passed EN15194, ROHS, CE and UL tests and certifications.

SENSOR

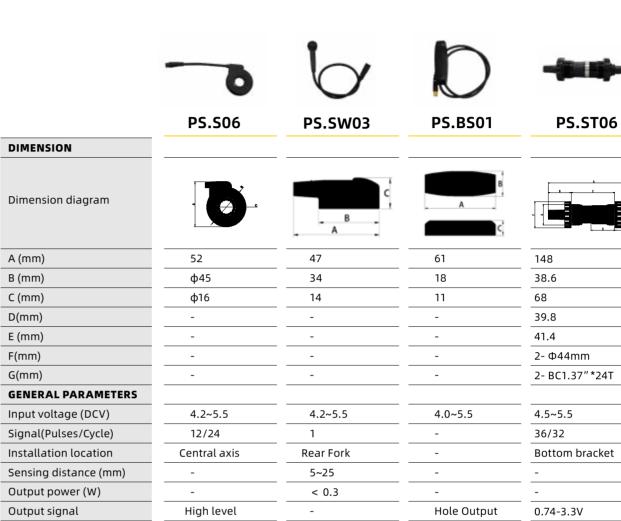

-

-

100±2

-

0.2(Adjustable)

Speed / Speed + Torque

68/73/84/100/120

JIS/ISIS

40-60

0.5-80

IPX5

-20~55

35

	IPX5	_	IP Level	IPX5	IPX5	IPX5
55	-20~55	_	Operating temperature (°C)	-20~55	-20~55	-20~55
- NEWSON.						
Thomas .						
C€ ■ 🕞	0.2					

Output impedance (Ω)

Signal Sensitivity((mV/N.m)

Duty Cycle Of Speed Signal (%)

Measuring Range(N.m)

Speed

-

Switch time (S)

Shaft Standard

BB Width(mm)

FUNCTION

PAS Mode

34 TruckRun eBike System Product Manual 2024 Edition Controller and sensor parameters list 35

DISPLAY









E03(UART)

CC01-X(UART)

	XE03(CAN)		XCB03(CAN)	XCC03(CAN)
PROTOCOL	UART/CAN	UART	UART/CAN	UART/CAN
DETAILED PARAMETERS				
Rated voltage(Vdc)	36/48/60	36/48/60	36/48/60	36/48/60
Display Type	LED	TFT	LCD	TFT
Support Modes	0-3/0-5/0-9	0-3/0-5/0-9	0-3/0-5/0-9	0-3/0-5/0-9
Mounting dimension	ф22.2	ф22.2/ф25.4/ф31.8	ф22.2	ф22.2/ф25.4/ф31.8
FUNCTION				
Truckrun IOT Solution	YES	-	-	YES
ОТА	YES	-	-	YES
Bluetooth	YES	-	-	YES
Light Sensor	YES	YES	-	YES
USB Charge	-	YES	-	YES
Real-time speed	YES	YES	YES	YES
Maximum speed	-	YES	-	YES
Average speed	-	YES	-	YES
Single mileage	-	YES	YES	YES
Total mileage	-	YES	YES	YES
Remaining mileage	-	-	YES	YES
Battery power display	YES	YES	YES	YES
Error code	YES	YES	YES	YES
Power display	-	YES	-	YES
Real-time current	-	YES	-	YES
Metric /Imperial	YES	YES	YES	YES
Walk-Assit function	YES	YES	YES	YES
Noise (dB)	< 55	< 55	< 60	< 60
IP Level	IPX5	IPX5	IPX5	IPX5
Operating Temperature (°C)	-20~55	-20~55	-20~55	-20~55








TruckRun's products have passed EN15194, ROHS, CE and UL tests and certifications

Follow TruckRun for more support!

Want to know more? Welcome to follow our official website and social media



truckrun-e.com/help





truckrun-e.com/contact

Be our partner and devote ourselves to the cause of using technology to create a healthy life

We have cooperated with dozens of ebike companies around the world to jointly create efficient, environmentally friendly and stylish ebikes. Welcome to our official website to contact us! TruckRun looks forward to cooperating with you!



truckrun-e.com/blog

Discover riding inspiration, pay attention to the latest news of TruckRun

ebikes have long since become a way of life. Here, we share with you the riding stories of Truckrun and friends, riding guides, product updates, Truckrun APP update documents,



truckrun-e.com/product

Learn more about product information

Want to know more about the product? You can screen and compare the parameters of different motors on the official website of TruckRun, and watch the video of the real car equipped with TruckRun drive systems. We also provide product manuals for you to download, so that you can fully understand product information.

Join the TruckRun Fan Club and share the fun with TruckRun and other cyclists

Want to know more about the product? You can filter and compare the parameters of different motors on the official website, and watch the real video equipped with TruckRun







36 TruckRun eBike System Product Manual 2024 Edition Follow TruckRun 37



TRUCK RUN



Website: www.truckrun-e.com

Order inquiries: salesman@truckrun-e.com Technology & Service: support@truckrun-e.com Market cooperation: marketing@truckrun-e.com

Address: Building 5, No.9, Xinqin Road, Xinwu District, Wuxi City, Jiangsu Province









©April 2023 Wuxi Truckrun Motor Co.,Ltd.